

A Mathematical Reconstruction of Endothelial Cell Networks

Okezue Bell^{1,*,\dagger} and Anthony Bell²

¹Stanford University, Department of Undergraduate Mathematics, Stanford, CA, 94305

²University of Pennsylvania School of Engineering and Applied Science, Philadelphia, PA, 19104

*okezue@stanford.edu

^{\dagger}Corresponding author. Please contact for all questions concerning the publication.

ABSTRACT

Endothelial cells form the linchpin of vascular and lymphatic systems, creating intricate networks that are pivotal for angiogenesis, controlling vessel permeability, and maintaining tissue homeostasis. Despite their critical roles, there is no rigorous mathematical framework to represent the connectivity structure of endothelial networks. Here, we develop a pioneering mathematical formalism called π -graphs to model the multi-type junction connectivity of endothelial networks. We define π -graphs as abstract objects consisting of endothelial cells and their junction sets, and introduce the key notion of π -isomorphism that captures when two π -graphs have the same connectivity structure. We prove several propositions relating the π -graph representation to traditional graph-theoretic representations, showing that π -isomorphism implies isomorphism of the corresponding unnested endothelial graphs, but not vice versa. We also introduce a temporal dimension to the π -graph formalism and explore the evolution of topological invariants in spatial embeddings of π -graphs. Finally, we outline a topological framework to represent the spatial embedding of π -graphs into geometric spaces. The π -graph formalism provides a novel tool for quantitative analysis of endothelial network connectivity and its relation to function, with the potential to yield new insights into vascular physiology and pathophysiology.

1 Introduction

The endothelium, a monolayer of endothelial cells lining the blood and lymphatic vessels, plays a central role in vascular homeostasis¹. Far from a passive conduit for blood flow, the endothelium actively regulates vascular permeability, blood coagulation, angiogenesis, and inflammatory responses. These functions arise from the ability of endothelial cells to form complex networks with specialized cell-cell junctions. Adherens junctions and tight junctions are ubiquitous structures that mechanically and chemically couple endothelial cells, while gap junctions mediate the passage of ions and small signaling molecules between cells. More recently discovered structures, such as nectin junctions, also contribute to endothelial connectivity. Collectively, endothelial cell-cell junctions enable the coordination of endothelial responses across vascular networks.

Endothelial network integrity is critical for vascular health, as disruption of interendothelial junctions and resulting increases in vascular permeability are key events in atherosclerosis, ischemia-reperfusion injury, sepsis, and other disease states²⁻⁴. Aberrant endothelial connectivity also enables the pathological angiogenesis seen in cancer and eye diseases⁵. Quantitative analysis of endothelial network structure therefore has the potential to yield new biomarkers and therapeutic strategies for vascular dysfunction⁶⁻¹⁰.

Network representations have become an invaluable tool for understanding the structure and function of complex biological systems. Prominent examples include neuron maps¹¹, metabolic system representations¹², cell-cell communication models^{13,14}, and protein-protein interaction networks¹⁵. In these contexts, network models have revealed fundamental organizing principles such as small-world topology, modularity, and centrality. A unifying mathematical language for biological networks has emerged from graph theory, which captures connectivity patterns between large numbers of interacting elements at a high fidelity.

However, standard graphs are not sufficient to capture the rich junction architecture connecting endothelial cells into vascular networks. A single edge between two cells cannot represent the multiple junction types that may exist between them¹⁶. Instead, endothelial network connectivity is inherently a multi-relation structure. Furthermore, the concept of the line graph, which can represent multi-edges, does not naturally capture the distinct types of endothelial junctions and their set-like organization around cells. As a result, a more sophisticated mathematical representation is needed.

Here we develop a mathematical formalism called π -graphs to meet this need. π -graphs are abstract structures that faithfully represent the multi-junction connectivity of endothelial networks using an intuitive set-based language. We define π -graphs and

their morphisms, and prove several results linking π -graphs to their underlying unnested endothelial graphs. We also describe a framework based on topological realization to represent the spatial embedding of endothelial networks. Our work provides an expressive, tractable, and generalizable framework to quantitatively interrogate endothelial networks.

2 Models and Methods

2.1 Basic Definitions

We begin by formally defining the notion of an endothelial π -graph. Let $\mathcal{E}$ be a finite set, whose elements we call endothelial cells (ECs). We consider four types of intercellular junctions that can connect ECs:

1. Adherens junctions (AJs): Cell-cell adhesion structures that mechanically link adjacent ECs via homophilic interactions between transmembrane VE-cadherin proteins¹⁷.
2. Tight junctions (TJs): Multiprotein complexes composed of claudins, occludins, and adaptor proteins that form a seal between adjacent ECs to regulate paracellular permeability¹⁸.
3. Gap junctions (GJs): Intercellular channels formed by connexin proteins that allow direct exchange of ions and small molecules (<1 kDa) between the cytoplasm of adjacent ECs¹⁹.
4. Nectin junctions (NJs): Adhesive structures formed by heterophilic interactions between nectin proteins that are distinct from but colocalize with AJs and help initiate cell-cell contacts²⁰.

We represent each of these junction types as a distinct symmetric binary relation on the set $\mathcal{E}$:

Definition 1 Let $\sim_{AJ}, \sim_{TJ}, \sim_{GJ}, \sim_{NJ}$ be symmetric binary relations on $\mathcal{E}$ representing adherens junctions, tight junctions, gap junctions, and nectin junctions respectively. The set of all junction relations is denoted $\mathcal{J}_{\mathcal{E}} := \sim_{AJ}, \sim_{TJ}, \sim_{GJ}, \sim_{NJ}$.

The relations in $\mathcal{J}_{\mathcal{E}}$ jointly determine the connectivity of the endothelial network. To capture the set of junctions incident at each EC, we introduce the notion of π -incidence:

Definition 2 A π -incidence on $\mathcal{E}$ is a function $\pi : \mathcal{E} \rightarrow \mathcal{P}(\mathcal{J}_{\mathcal{E}})$ satisfying:

1. (Junction Consistency) For all $x \in \mathcal{E}$ and $\sim \in \mathcal{J}_{\mathcal{E}}$,

$$\sim \in \pi(x) \iff \exists y \in \mathcal{E} \text{ s.t. } x \sim y$$

2. (Nondegeneracy) For all $x \in \mathcal{E}$, $\pi(x) \neq \emptyset$

The Junction Consistency condition states that a cell x is π -incident to a junction relation $\sim$ if and only if x is connected by $\sim$ to some other cell. The Nondegeneracy condition requires that each cell participates in at least one junction. Note that distinct elements $x, y \in \mathcal{E}$ may share multiple junction relations, i.e. $|\pi(x) \cap \pi(y)| > 1$. This multi-relational structure is a key feature of endothelial networks that motivates the π -graph formalism.

With these ingredients, we can now define the central object of study:

Definition 3 An endothelial π -graph is a tuple $G = (\mathcal{E}, \pi)$ where $\mathcal{E}$ is a finite set of ECs and π is a π -incidence on $\mathcal{E}$. The set of all π -graphs is denoted $\mathcal{W}$.

Thus, a π -graph $G \in \mathcal{W}$ encodes the network connectivity of an endothelial monolayer as a set $\mathcal{E}$ of ECs and a π -incidence reflecting the junction architecture connecting the ECs. Figure 1 illustrates a simple example.

2.2 Elementary Properties

π -graphs satisfy a number of basic properties that reflect natural features of endothelial networks. We highlight a few key properties here.

First, the local junction architecture around an EC is encoded by its π -incidence:

Proposition 1 Let $G = (\mathcal{E}, \pi)$ be a π -graph. For any $x \in \mathcal{E}$, the set $\pi(x)$ uniquely determines the set of all ECs sharing a junction with x , i.e.

$$y \in \mathcal{E} : \exists \sim \in \pi(x) \text{ s.t. } x \sim y = \bigcup_{\sim \in \pi(x)} [x]_{\sim} \setminus x$$

where $[x]_{\sim}$ denotes the equivalence class of x under the relation $\sim$.

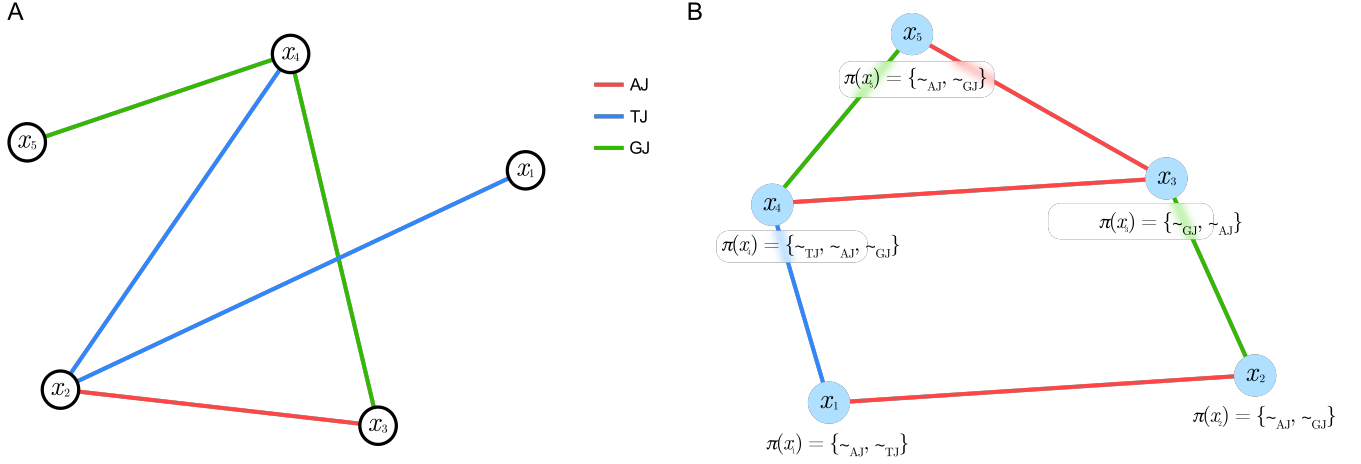


Figure 1. Example of an endothelial π -graph $G = (\mathcal{E}, \pi)$. (A) Schematic of an EC monolayer with ECs (labeled $x_1, \dots, x_5$) connected by adherens junctions (red), tight junctions (blue), and gap junctions (green). (B) The π -graph representation of the monolayer, with π -incidence displayed as junction sets associated to each cell. For instance, $\pi(x_1) = \sim_{AJ}, \sim_{TJ}$.

Proof 1 Let $y \in \mathcal{E}$ with $y \neq x$. If y shares a junction with x , then there exists $\sim \in \pi(x)$ such that $x \sim y$. By definition of equivalence class, this implies $y \in [x] \sim \setminus x$.

Conversely, suppose $y \in [x] \sim \setminus x$ for some $\sim \in \pi(x)$. By definition of equivalence class, we have $x \sim y$, so x and y share a junction. Therefore

$$y \in \mathcal{E} : \exists \sim \in \pi(x) \text{ s.t. } x \sim y = \bigcup_{\sim \in \pi(x)} [x] \sim \setminus x$$

as desired.

This property allows us to recover the local "junction neighborhood" of a cell from its π -incidence alone. In biological terms, the junction neighborhood reflects the set of all cells that can directly communicate with or mechanically influence a given cell.

Next, we consider the global connectivity of π -graphs. Define a path of length n from x to y in G as a sequence of cells $x = x_0, x_1, \dots, x_n = y$ such that for each $0 \leq i < n$, there exists $\sim \in \pi(x_i) \cap \pi(x_{i+1})$ with $x_i \sim x_{i+1}$. We say G is connected if there exists a path between any two cells:

Proposition 2 A π -graph $G = (\mathcal{E}, \pi)$ is connected if and only if for all $x, y \in \mathcal{E}$, there exists a path from x to y .

Connectivity of the π -graph captures the ability of ECs to communicate across the endothelial monolayer via a combination of junction types. This communication may take the form of mechanical forces transmitted via AJs, chemical and electrical signals propagated by GJs, or regulation of paracellular transport through the coordination of TJs and NJs. In this sense, π -graph connectivity abstractly reflects integrated endothelial function.

Finally, we define an operation called π -union that models the merging of two π -graphs over a common subset of ECs:

Definition 4 Let $G_1 = (\mathcal{E}_1, \pi_1)$ and $G_2 = (\mathcal{E}_2, \pi_2)$ be π -graphs with $\mathcal{E}_1 \cap \mathcal{E}_2 \neq \emptyset$. The π -union of G_1 and G_2 is the π -graph $G_1 \sqcup_{\pi} G_2 = (\mathcal{E}_1 \cup \mathcal{E}_2, \pi_{1 \cup 2})$ where for $x \in \mathcal{E}_1 \cup \mathcal{E}_2$,

$$\pi_{1 \cup 2}(x) = \begin{cases} \pi_1(x) & \text{if } x \in \mathcal{E}_1 \setminus \mathcal{E}_2 \\ \pi_2(x) & \text{if } x \in \mathcal{E}_2 \setminus \mathcal{E}_1 \\ \pi_1(x) \cup \pi_2(x) & \text{if } x \in \mathcal{E}_1 \cap \mathcal{E}_2 \end{cases}$$

Intuitively, the π -union glues together two π -graphs along their common ECs and unions the π -incidences of the common ECs (Figure 2). This models the formation of a larger endothelial tissue by merging two smaller tissues with some overlapping cells. The notation $\sqcup_{\pi}$ was chosen to suggest a modified disjoint union operation that preserves the common elements and their π -incidences.

The π -union provides a natural way to build up complex π -graphs from simpler building blocks, and to decompose π -graphs into components. One can show that π -union is associative and commutative up to π -isomorphism (defined in the next section), giving the set of π -graphs the algebraic structure of a commutative monoid.

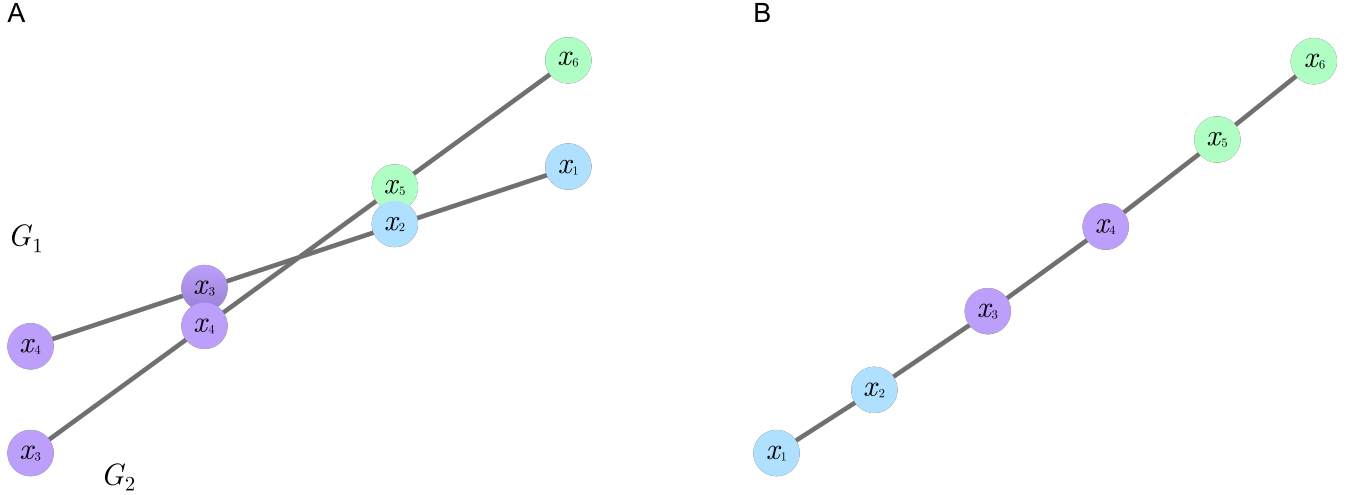


Figure 2. Schematic illustration of π -union. (A) Two π -graphs G_1 and G_2 with overlapping ECs x_3, x_4 (purple). (B) The π -union $G_1 \sqcup_{\pi} G_2$ merges the graphs along the common cells. The π -incidence of each common cell unites those from G_1 and G_2 (purple sets).

Having established the basic definition and properties of π -graphs, we turn next to the notion of π -graph isomorphism to characterize when two π -graphs have the same connectivity structure.

3 Results

3.1 π -graph Isomorphisms

A fundamental question in the construction of such π -graphs is when two π -graphs have the same connectivity structure. To formalize this notion, we introduce the concept of π -graph isomorphism:

Definition 5 Let $G_1 = (\mathcal{E}_1, \pi_1)$ and $G_2 = (\mathcal{E}_2, \pi_2)$ be π -graphs. A π -graph isomorphism from G_1 to G_2 is a bijective function $\varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_2$ such that for all $x \in \mathcal{E}_1$ and $\sim \in \mathcal{J}_{\mathcal{E}_1}$,

$$\sim \in \pi_1(x) \iff \varphi(\sim) \in \pi_2(\varphi(x))$$

where $\varphi(\sim) := (\varphi(a), \varphi(b)) : a \sim b$.

If such an isomorphism exists, we say G_1 and G_2 are π -isomorphic and write $G_1 \cong_{\pi} G_2$. The set of all π -isomorphisms from G_1 to G_2 is denoted $\text{Iso}_{\pi}(G_1, G_2)$.

Intuitively, a π -isomorphism is a bijection between the EC sets of two π -graphs that preserves the π -incidence structure. The condition $\sim \in \pi_1(x) \iff \varphi(\sim) \in \pi_2(\varphi(x))$ ensures that if two ECs are connected by a junction in G_1 , then their images under φ are connected by the same type of junction in G_2 , and vice versa.

Figure 3 illustrates an example of π -isomorphic graphs, with the dashed arrows indicating the bijection φ that preserves the color-coded π -incidence structure.

The following proposition establishes basic properties of π -isomorphisms:

Proposition 3 Let $\mathfrak{W}$ be the class of π -graphs.

1. For any $G \in \mathfrak{W}$, the identity function $\text{id}_{\mathcal{E}} : \mathcal{E} \rightarrow \mathcal{E}$ is a π -isomorphism from G to itself.
2. For any π -isomorphism $\varphi : G_1 \rightarrow G_2$, the inverse function $\varphi^{-1} : \mathcal{E}_2 \rightarrow \mathcal{E}_1$ is a π -isomorphism from G_2 to G_1 .
3. For any π -isomorphisms $\varphi : G_1 \rightarrow G_2$ and $\psi : G_2 \rightarrow G_3$, the composition $\psi \circ \varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_3$ is a π -isomorphism from G_1 to G_3 .

Therefore, π -isomorphism defines an equivalence relation on $\mathfrak{W}$.

Proof 2 (1) For any $x \in \mathcal{E}$ and $\sim \in \mathcal{J}_{\mathcal{E}}$, we have $\sim \in \pi(x) \iff \text{id}_{\mathcal{E}}(\sim) \in \pi(\text{id}_{\mathcal{E}}(x))$ since $\text{id}_{\mathcal{E}}(\sim) = \sim$ and $\text{id}_{\mathcal{E}}(x) = x$. Thus $\text{id}_{\mathcal{E}}$ is a π -isomorphism.

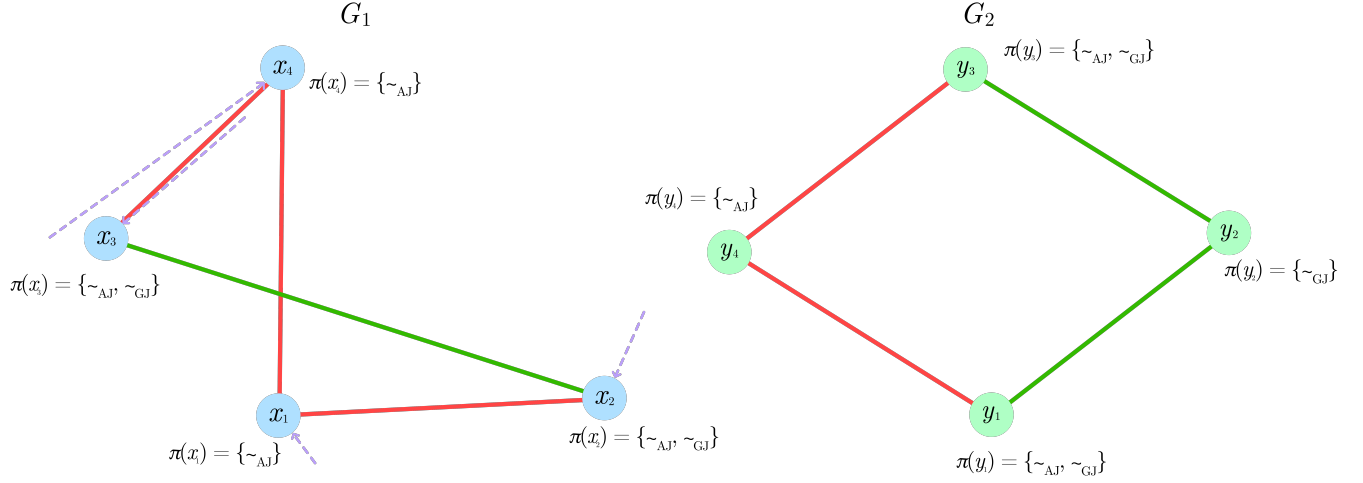


Figure 3. Example of π -isomorphic graphs G_1 and G_2 . The bijection $\varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_2$ (dashed arrows) preserves the π -incidence structure, i.e. $x_i \sim x_j$ in G_1 if and only if $\varphi(x_i) \sim \varphi(x_j)$ in G_2 for each junction type $\sim$. The coloring of the graph edges and corresponding junction type is consistent with Figure 1.

(2) Let $\varphi : (\mathcal{E}_1, \pi_1) \rightarrow (\mathcal{E}_2, \pi_2)$ be a π -isomorphism. For any $y \in \mathcal{E}_2$ and $\sim \in \mathcal{J}_{\mathcal{E}_2}$, we have

$$\begin{aligned} \sim \in \pi_2(y) &\iff \varphi^{-1}(\sim) \in \pi_1(\varphi^{-1}(y)) \\ &\iff (\varphi^{-1}(a), \varphi^{-1}(b)) : a \sim b \in \pi_1(\varphi^{-1}(y)) \end{aligned}$$

since φ is a bijection. Thus φ^{-1} is a π -isomorphism.

(3) Let $\varphi : (\mathcal{E}_1, \pi_1) \rightarrow (\mathcal{E}_2, \pi_2)$ and $\psi : (\mathcal{E}_2, \pi_2) \rightarrow (\mathcal{E}_3, \pi_3)$ be π -isomorphisms. For any $x \in \mathcal{E}_1$ and $\sim \in \mathcal{J}_{\mathcal{E}_1}$, we have

$$\begin{aligned} \sim \in \pi_1(x) &\iff \varphi(\sim) \in \pi_2(\varphi(x)) \\ &\iff \psi(\varphi(\sim)) \in \pi_3(\psi(\varphi(x))) \\ &\iff (\psi \circ \varphi)(\sim) \in \pi_3((\psi \circ \varphi)(x)) \end{aligned}$$

Thus $\psi \circ \varphi$ is a π -isomorphism.

Properties (1)-(3) are the reflexive, symmetric, and transitive properties of an equivalence relation²¹, respectively. Therefore, π -isomorphism is an equivalence relation on the class of π -graphs.

This proposition justifies the notation $G_1 \cong_{\pi} G_2$ for π -isomorphic graphs, and allows us to partition the class of π -graphs into equivalence classes $[G]\pi = H \in \mathcal{W} : H \cong_{\pi} G$ represented by a distinguished element $G \in \mathcal{W}$.

3.2 Relationship to Standard Graph Isomorphism

We explore the relationship between π -isomorphism and the standard notion of graph isomorphism. To make this relationship precise, we introduce an "unnested" representation of an endothelial π -graph.

Given a π -graph $G = (\mathcal{E}, \pi)$, define the unnested endothelial junction graph (or simply unnested graph) of G as $U_G = (\mathcal{E}, \bigcup_{x \in \mathcal{E}} \pi(x))$. In other words, U_G is the graph whose vertices are the ECs of G and whose edges represent the individual junctions, without the π -incidence structure. Figure 4 illustrates this construction.

We can now relate π -isomorphisms of π -graphs to standard graph isomorphisms of their unnested graphs:

Proposition 4 Let $G_1 = (\mathcal{E}_1, \pi_1)$ and $G_2 = (\mathcal{E}_2, \pi_2)$ be π -graphs with unnested graphs $U_{G_1} = (\mathcal{E}_1, R_1)$ and $U_{G_2} = (\mathcal{E}_2, R_2)$, respectively. If $\varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_2$ is a π -isomorphism from G_1 to G_2 , then φ is a graph isomorphism from U_{G_1} to U_{G_2} .

Proof 3 Let $x, y \in \mathcal{E}_1$. We must show that $(x, y) \in R_1$ if and only if $(\varphi(x), \varphi(y)) \in R_2$. Suppose $(x, y) \in R_1$. By definition of unnested graph, there exists $\sim \in \pi_1(x)$ such that $x \sim y$. Since φ is a π -isomorphism, this implies $\varphi(\sim) \in \pi_2(\varphi(x))$ and $\varphi(x) \sim \varphi(y)$. Therefore $(\varphi(x), \varphi(y)) \in R_2$. The converse follows by a symmetric argument.

This proposition shows that π -isomorphism is a stronger condition than unnested graph isomorphism, i.e. π -isomorphic π -graphs necessarily have isomorphic unnested graphs. However, the converse is not true in general:

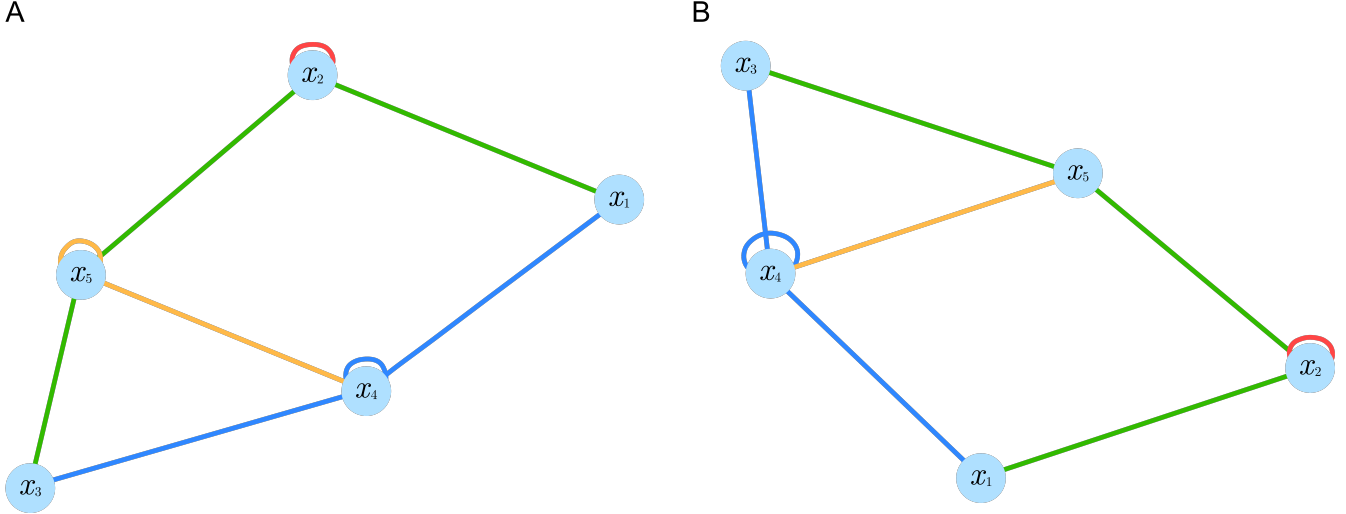


Figure 4. Unnested graph construction. (A) π -graph G with ECs $x_1, \dots, x_5$ connected by multiple junction types (colored edges). (B) The unnested graph U_G retains the EC vertices but replaces the π -incidences with individual junction edges. Distinct junction types between two ECs yield multiple edges (e.g. the AJ and GJ between x_1 and x_2).

Proposition 5 *There exist π -graphs G_1 and G_2 such that U_{G_1} and U_{G_2} are isomorphic as graphs but $G_1 \not\cong_{\pi} G_2$.*

Proof 4 *We construct a counterexample. Let $\mathcal{E} = x_1, x_2, x_3$ and consider the following π -graphs:*

$$G_1 = (\mathcal{E}, \pi_1) \text{ where } \pi_1(x_1) = \sim_{AJ}, \pi_1(x_2) = \sim_{AJ}, \sim_{GJ}, \pi_1(x_3) = \sim_{GJ}$$

$$G_2 = (\mathcal{E}, \pi_2) \text{ where } \pi_2(x_1) = \sim_{AJ}, \sim_{GJ}, \pi_2(x_2) = \sim_{GJ}, \pi_2(x_3) = \sim_{AJ}$$

and junction relations given by: $x_1 \sim_{AJ} x_2, x_2 \sim_{AJ} x_1, x_2 \sim_{GJ} x_3, x_3 \sim_{GJ} x_2, x_1 \sim_{AJ} x_3$. The unnested graphs are:

$$U_{G_1} = (\mathcal{E}, (x_1, x_2), (x_2, x_1), (x_2, x_3), (x_3, x_2))$$

$$U_{G_2} = (\mathcal{E}, (x_1, x_2), (x_2, x_1), (x_1, x_3), (x_3, x_1))$$

which are isomorphic via the bijection $\varphi : \mathcal{E} \rightarrow \mathcal{E}$ defined by $\varphi(x_1) = x_1, \varphi(x_2) = x_3, \varphi(x_3) = x_2$. However, $G_1 \not\cong_{\pi} G_2$ since there is no bijection $\psi : \mathcal{E} \rightarrow \mathcal{E}$ that preserves the π -incidence structure, i.e. $\sim \in \pi_1(x) \iff \psi(\sim) \in \pi_2(\psi(x))$ for all $x \in \mathcal{E}$ and $\sim \in \mathcal{J}_{\mathcal{E}}$. Intuitively, this is because the distribution of AJ and GJ among the ECs differs between G_1 and G_2 , even though they have the same total number of junctions.

This proposition highlights a key feature of the π -graph formalism: it captures connectivity information beyond what is represented by the unnested graph. The additional information is precisely the π -incidence structure that encodes which subsets of ECs are connected by each junction type.

Despite this negative result, there are some conditions under which π -isomorphism and unnested graph isomorphism coincide:

Proposition 6 *Let $G_1 = (\mathcal{E}_1, \pi_1)$ and $G_2 = (\mathcal{E}_2, \pi_2)$ be π -graphs satisfying the following conditions:*

1. $\forall x, y \in \mathcal{E}_i, |\pi_i(x) \cap \pi_i(y)| \leq 1$ ($i = 1, 2$).
2. $\forall x \in \mathcal{E}_i, \forall \sim, \approx \in \pi_i(x)$ with $\sim \neq \approx, [x] \sim \cap [x] \approx = x$ ($i = 1, 2$).

If $\varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_2$ is an unnested graph isomorphism (i.e. a graph isomorphism from U_{G_1} to U_{G_2}), then φ is also a π -isomorphism from G_1 to G_2 .

Proof 5 *Assume the hypotheses and let $\varphi : \mathcal{E}_1 \rightarrow \mathcal{E}_2$ be an unnested graph isomorphism. We must show that φ preserves the π -incidence structure, i.e. for all $x \in \mathcal{E}_1$ and $\sim \in \mathcal{J}_{\mathcal{E}_1}$,*

$$\sim \in \pi_1(x) \iff \varphi(\sim) \in \pi_2(\varphi(x))$$

($\implies$) Suppose $\sim \in \pi_1(x)$. By definition of π_1 , there exists $y \in \mathcal{E}_1$ with $y \neq x$ such that $x \sim y$. Since φ is an unnested graph isomorphism, this implies $(\varphi(x), \varphi(y)) \in R_2$, i.e. there exists $\approx \in \pi_2(\varphi(x))$ such that $\varphi(x) \approx \varphi(y)$. We claim that $\approx = \varphi(\sim)$.

Suppose for contradiction that $\approx \neq \varphi(\sim)$. Then by condition (2), $[\varphi(x)] \approx \cap [\varphi(x)] \varphi(\sim) = \varphi(x)$. But $\varphi(y) \in [\varphi(x)] \approx$ by definition of $\approx$, and $\varphi(y) \in [\varphi(x)] \varphi(\sim)$ since $y \in [x] \sim$ and φ is a graph isomorphism. This contradicts $[\varphi(x)] \approx \cap [\varphi(x)] \varphi(\sim) = \varphi(x)$. Therefore $\approx = \varphi(\sim)$, so $\varphi(\sim) \in \pi_2(\varphi(x))$.

($\impliedby$) Conversely, suppose $\varphi(\sim) \in \pi_2(\varphi(x))$. By definition of π_2 , there exists $z \in \mathcal{E}_2$ with $z \neq \varphi(x)$ such that $\varphi(x) \sim z$. Since φ is a bijection, $z = \varphi(y)$ for some $y \in \mathcal{E}_1$ with $y \neq x$. Moreover, since φ is an unnested graph isomorphism, $(\varphi(x), \varphi(y)) \in R_2$ implies $(x, y) \in R_1$, i.e. there exists $\approx \in \pi_1(x)$ such that $x \approx y$.

We claim that $\approx = \sim$. Suppose for contradiction that $\approx \neq \sim$. By condition (1), $|\pi_1(x) \cap \pi_1(y)| \leq 1$, so $\approx$ is the unique junction relation between x and y in G_1 . But by the forward direction of the proof, $\approx \in \pi_1(x)$ implies $\varphi(\approx) \in \pi_2(\varphi(x))$, and $\varphi(\approx) \neq \varphi(\sim)$ since $\approx \neq \sim$ and φ is injective. This contradicts condition (1) for G_2 , since $\varphi(\sim), \varphi(\approx) \in \pi_2(\varphi(x)) \cap \pi_2(\varphi(y))$. Therefore $\approx = \sim$, so $\sim \in \pi_1(x)$.

The conditions in this proposition have a natural biological interpretation. Condition (1) states that any two ECs share at most one type of junction. Condition (2) states that distinct junction relations on a common EC connect that EC to disjoint sets of ECs. In other words, the conditions preclude having multiple redundant junctions between ECs and ensure that each junction relation represents a unique connectivity pattern.

Under these biologically plausible assumptions¹⁶, the π -graph and unnested graph representations are equivalent up to isomorphism. This suggests that for endothelial networks satisfying the assumptions, one can work with the simpler unnested graph representation without losing connectivity information. However, the π -graph representation is still valuable for encoding the multiplicity of junction types and explicitly representing the junction architecture around each EC.

3.3 Spatial Representation

We now introduce a framework to represent the spatial embedding and geometry of π -graphs, extending the abstract connectivity structure to incorporate biologically relevant spatial information. Our approach is based on the theory of topological graphs and their embeddings into geometric spaces.

3.4 Topological π -graphs

We begin by defining a topological π -graph, which endows an abstract π -graph with a topology inherited from its vertex and edge sets.

Definition 6 A topological π -graph is a tuple $\mathcal{G} = (G, \mathcal{T}_\mathcal{E}, \mathcal{T}_\mathcal{J})$ where:

1. $G = (\mathcal{E}, \pi)$ is an abstract π -graph.
2. $\mathcal{T}_\mathcal{E}$ is a topology on the vertex set $\mathcal{E}$.
3. $\mathcal{T}_\mathcal{J}$ is a topology on the set of junctions $\mathcal{J}_G := \bigcup_{x \in \mathcal{E}} \pi(x)$.
4. (Continuity) The π -incidence $\pi : \mathcal{E} \rightarrow \mathcal{P}(\mathcal{J}_G)$ is continuous with respect to $\mathcal{T}_\mathcal{E}$ and the subspace topology on $\mathcal{P}(\mathcal{J}_G)$ induced by $\mathcal{T}_\mathcal{J}$.

Intuitively, a topological π -graph equips the vertex and edge sets of an abstract π -graph with topologies that are compatible with the π -incidence structure, in the sense that the π -incidence map is continuous. This allows us to treat π -graphs as geometric objects and study their topological properties.

A natural choice for the vertex topology $\mathcal{T}_\mathcal{E}$ is the discrete topology, which captures the intuition that ECs are distinct, separated objects. For the junction topology $\mathcal{T}_\mathcal{J}$, there are several biologically motivated options, such as the discrete topology (treating junctions as distinct objects), the Euclidean topology (embedding junctions into Euclidean space), or a more general geometric topology (e.g. representing junctions as simplicial complexes). The choice of junction topology depends on the specific geometric properties one wishes to model.

Figure 5 illustrates an example of a topological π -graph with discrete vertex topology and Euclidean junction topology.

3.5 Spatial Embeddings of π -graphs

We now turn to the problem of embedding topological π -graphs into geometric spaces in a way that respects the π -incidence structure and junction geometry. We focus on embeddings into Euclidean space $\mathbb{R}^d$, but the framework can be generalized to other spaces (e.g. manifolds) as needed.

Definition 7 Let $\mathcal{G} = (G, \mathcal{T}_\mathcal{E}, \mathcal{T}_\mathcal{J})$ be a topological π -graph and $d \geq 1$. A spatial embedding of $\mathcal{G}$ into $\mathbb{R}^d$ is a pair of continuous maps $(\varphi_\mathcal{E}, \varphi_\mathcal{J})$ where:

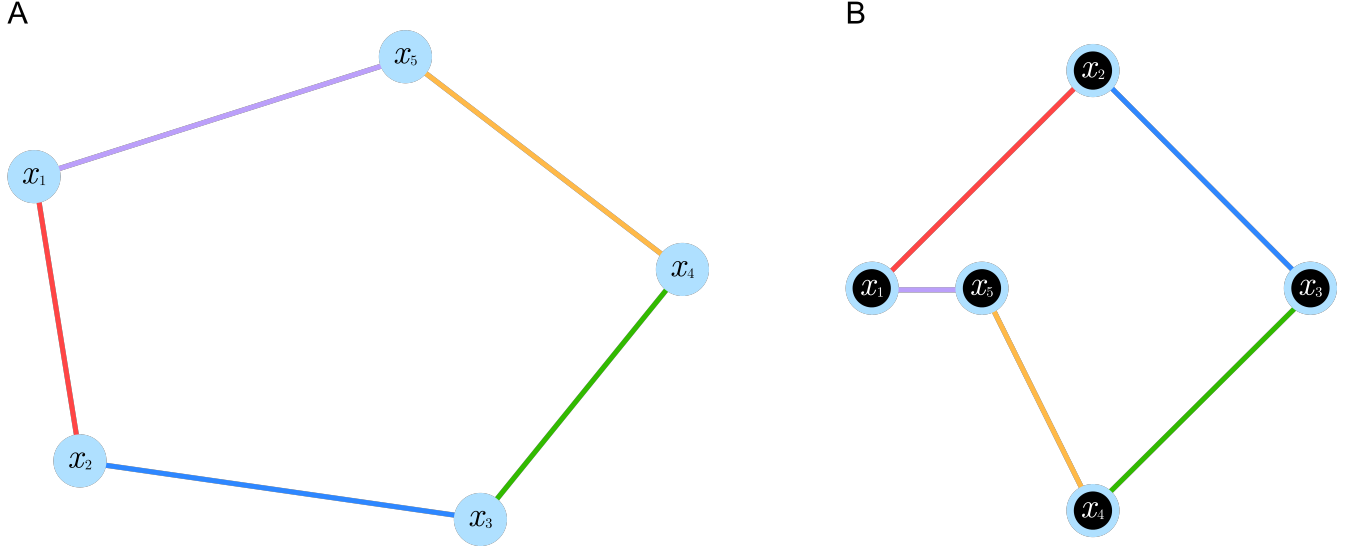


Figure 5. Example of a topological π -graph. (A) Abstract π -graph with vertices $x_1, \dots, x_5$ and junctions represented by colored edges. (B) Topological π -graph embedding into $\mathbb{R}^2$. Vertices are embedded as discrete points (black dots) and junctions are embedded as line segments connecting vertices (colored lines). The π -incidence is represented by the adjacency of vertex points and junction segments.

1. $\varphi_{\mathcal{E}} : (\mathcal{E}, \mathcal{T}_{\mathcal{E}}) \rightarrow \mathbb{R}^d$ embeds the vertices.
2. $\varphi_{\mathcal{J}} : (\mathcal{J}_G, \mathcal{T}_{\mathcal{J}}) \rightarrow \mathcal{K}(\mathbb{R}^d)$ embeds the junctions, where $\mathcal{K}(\mathbb{R}^d)$ is the hyperspace of nonempty compact subsets of $\mathbb{R}^d$ with the Vietoris topology.
3. (Incidence Compatibility) For all $x \in \mathcal{E}$ and $j \in \mathcal{J}_G$,

$$j \in \pi(x) \iff \varphi_{\mathcal{E}}(x) \in \varphi_{\mathcal{J}}(j)$$

Most crucially, vertices are embedded as points in $\mathbb{R}^d$ via the continuous map $\varphi_{\mathcal{E}}$, junctions are embedded as nonempty compact subsets of $\mathbb{R}^d$ via the continuous map $\varphi_{\mathcal{J}}$. The compactness requirement ensures that junctions are bounded and closed, which are natural geometric constraints. The hyperspace $\mathcal{K}(\mathbb{R}^d)$ is equipped with the Vietoris topology, which provides a notion of convergence for sequences of compact sets, and the Incidence Compatibility condition ensures that the spatial embedding respects the π -incidence structure, i.e. a vertex x is incident to a junction j in the π -graph if and only if the embedded vertex point $\varphi_{\mathcal{E}}(x)$ lies in the embedded junction region $\varphi_{\mathcal{J}}(j)$.

Figure 6 illustrates spatial embedding for a simple π -graph.

The definition of spatial embedding provides a general framework to represent the geometry of π -graphs. By choosing appropriate vertex and junction topologies and embedding maps, one can model a variety of biologically relevant scenarios, such as:

- ECs as point particles and junctions as line segments or polygonal chains representing the physical connections between cells.
- ECs as extended spatial regions (e.g. polygons or ellipsoids) and junctions as overlap regions between cells.
- ECs as point particles and junctions as probability distributions over $\mathbb{R}^d$ representing the likelihood of a junction occurring at each point in space.

In each case, the embedding maps $\varphi_{\mathcal{E}}$ and $\varphi_{\mathcal{J}}$ can be tailored to capture the desired geometric properties, such as continuity, smoothness, or distance constraints.

3.6 Topological Invariants

An important aspect of spatial embeddings is their behavior under continuous deformations²², which capture the idea of elastic transformations that preserve intrinsic structure. This leads to the notion of topological invariants, which are properties of spatial embeddings that are preserved by continuous deformations.

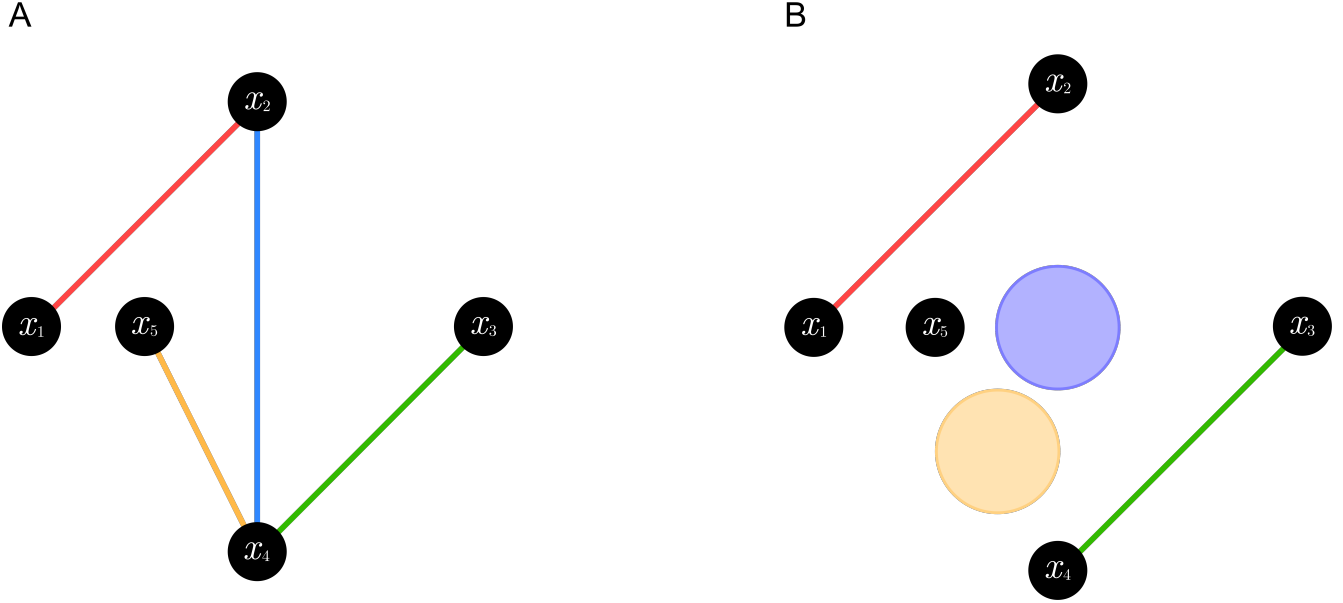


Figure 6. Example of spatial embedding. (A) Topological π -graph with discrete vertex topology and Euclidean junction topology. (B) Spatial embedding into $\mathbb{R}^2$. Vertices are embedded as points and junctions are embedded as line segments (AJ and GJ) or circular disks (TJ and NJ). Incidence compatibility is depicted by vertex points lying in their incident junction regions.

Definition 8 Let $\mathcal{G}$ be a topological π -graph and let $(\varphi_{\mathcal{E}}, \varphi_{\mathcal{J}})$ and $(\psi_{\mathcal{E}}, \psi_{\mathcal{J}})$ be spatial embeddings of $\mathcal{G}$ into $\mathbb{R}^d$. A continuous deformation from $(\varphi_{\mathcal{E}}, \varphi_{\mathcal{J}})$ to $(\psi_{\mathcal{E}}, \psi_{\mathcal{J}})$ is a pair of continuous maps $(H_{\mathcal{E}}, H_{\mathcal{J}})$ where:

1. $H_{\mathcal{E}} : \mathcal{E} \times [0, 1] \rightarrow \mathbb{R}^d$ is a homotopy from $\varphi_{\mathcal{E}}$ to $\psi_{\mathcal{E}}$, i.e. $H_{\mathcal{E}}(x, 0) = \varphi_{\mathcal{E}}(x)$ and $H_{\mathcal{E}}(x, 1) = \psi_{\mathcal{E}}(x)$ for all $x \in \mathcal{E}$.
2. $H_{\mathcal{J}} : \mathcal{J}_G \times [0, 1] \rightarrow \mathcal{K}(\mathbb{R}^d)$ is a homotopy from $\varphi_{\mathcal{J}}$ to $\psi_{\mathcal{J}}$, i.e. $H_{\mathcal{J}}(j, 0) = \varphi_{\mathcal{J}}(j)$ and $H_{\mathcal{J}}(j, 1) = \psi_{\mathcal{J}}(j)$ for all $j \in \mathcal{J}_G$.
3. (Incidence Compatibility) For all $x \in \mathcal{E}$, $j \in \mathcal{J}_G$, and $t \in [0, 1]$,

$$j \in \pi(x) \iff H_{\mathcal{E}}(x, t) \in H_{\mathcal{J}}(j, t)$$

If such a deformation exists, we say $(\varphi_{\mathcal{E}}, \varphi_{\mathcal{J}})$ and $(\psi_{\mathcal{E}}, \psi_{\mathcal{J}})$ are topologically equivalent embeddings.

Intuitively, a continuous deformation is a continuous path in the space of spatial embeddings that preserves the incidence compatibility condition at each point along the path. Topological equivalence of embeddings is then the equivalence relation generated by the existence of a continuous deformation.

A topological invariant of a spatial embedding is a property that is preserved by topological equivalence. Figure 7 illustrates some examples of topological invariants for simple π -graph embeddings.

The study of topological invariants provides a powerful tool to classify and compare the intrinsic structure of spatial embeddings, independent of the specific geometry. By computing invariants for different endothelial networks and comparing them across conditions, one can gain insight into the topological organization of the endothelium and how it relates to function.

3.7 Temporal Dynamics of π -graphs


To capture the dynamic nature of endothelial networks, we extend the π -graph formalism by introducing a temporal dimension. Let $T \subseteq \mathbb{R}$ be a time interval of interest. We define a *temporal π -graph* as a tuple $\mathcal{G} = (G, \tau)$ where:

1. $G = (\mathcal{E}, \pi)$ is an abstract π -graph.
2. $\tau : T \rightarrow \mathcal{G}$ is a continuous function that assigns a π -graph $\tau(t) = (\mathcal{E}_t, \pi_t)$ to each time point $t \in T$.

Intuitively, a temporal π -graph represents the evolution of an endothelial network over time, with the topology of the network encoded by the time-varying π -incidence function π_t . We require that the vertex set $\mathcal{E}_t$ and junction set $\mathcal{J}_{\mathcal{E}_t}$ vary continuously with time to ensure well-defined dynamics.

The temporal π -graph formalism enables us to study the dynamics of endothelial network connectivity, such as the formation and dissolution of junctions, the migration of ECs, and the remodeling of network topology. By considering the time-dependent properties of π -graphs, we can develop more realistic models of angiogenesis, vascular permeability, and other dynamic processes in the endothelium (Figure 8).

A

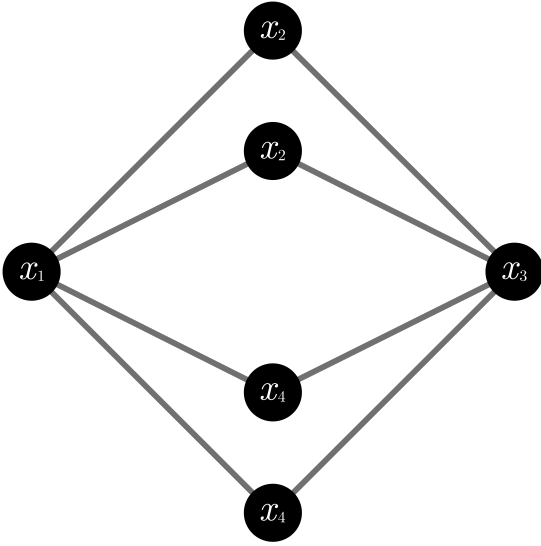

B

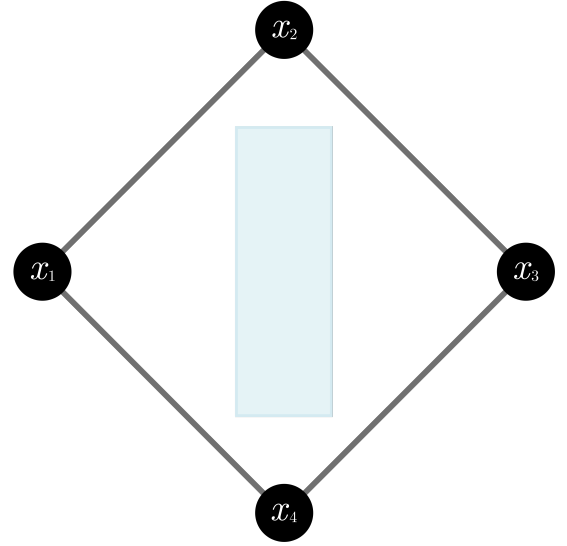


Figure 7. Examples of topological invariants. (A) Two topologically equivalent embeddings with the same connected component, cycle, and intersection pattern. (B) Two embeddings that are not topologically equivalent, differing by the presence of a cycle (left) versus a void (right).

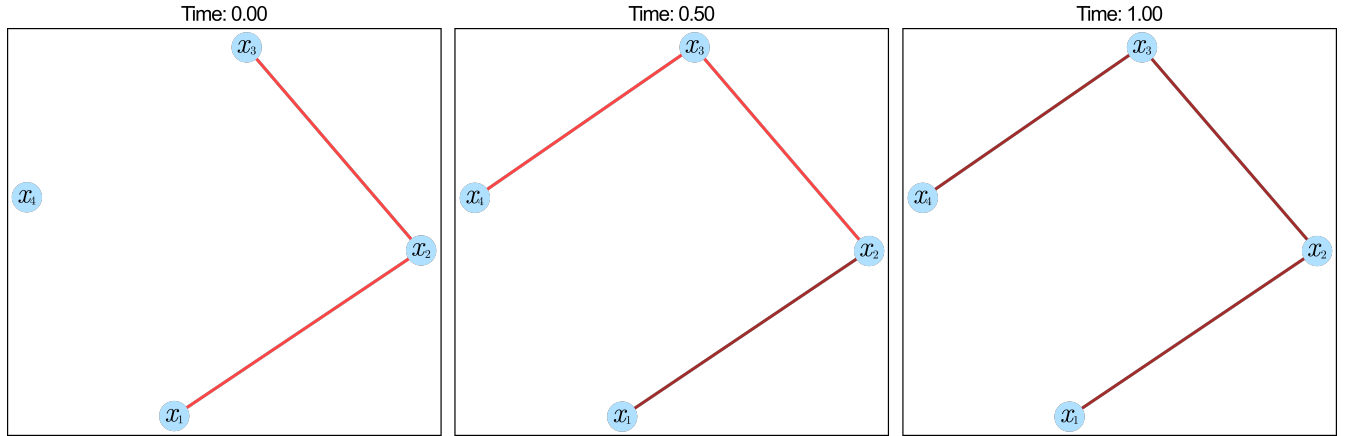


Figure 8. Schematic illustration of a temporal π -graph evolving over time. The network topology, encoded by the π -incidence, changes continuously as junctions form, dissolve, and remodel.

3.8 Evolution of Topological Invariants

The spatial embedding framework introduced in Section 3.6 naturally extends to temporal π -graphs. We define a *spatiotemporal embedding* of a temporal π -graph $\mathcal{G} = (G, \tau)$ into $\mathbb{R}^d$ as a pair of continuous maps $(\Phi_{\mathcal{E}}, \Phi_{\mathcal{J}})$ where:

1. $\Phi_{\mathcal{E}} : \mathcal{E} \times T \rightarrow \mathbb{R}^d$ embeds the vertices.
2. $\Phi_{\mathcal{J}} : \mathcal{J} \times T \rightarrow \mathcal{H}(\mathbb{R}^d)$ embeds the junctions, where $\mathcal{J} := \bigcup_{t \in T} \mathcal{J}_t$ is the set of all junctions across time.

The spatiotemporal embedding maps vertices and junctions into $\mathbb{R}^d$ continuously over time, respecting the π -incidence structure at each time point.

With this framework in place, we can study the evolution of topological invariants of endothelial networks. For instance, we can track the number of connected components, cycles, or higher-dimensional holes as the network evolves under physiological or pathological conditions (Figure 9). The persistence of these invariants over time provides insight into the robustness and adaptability of the network topology.

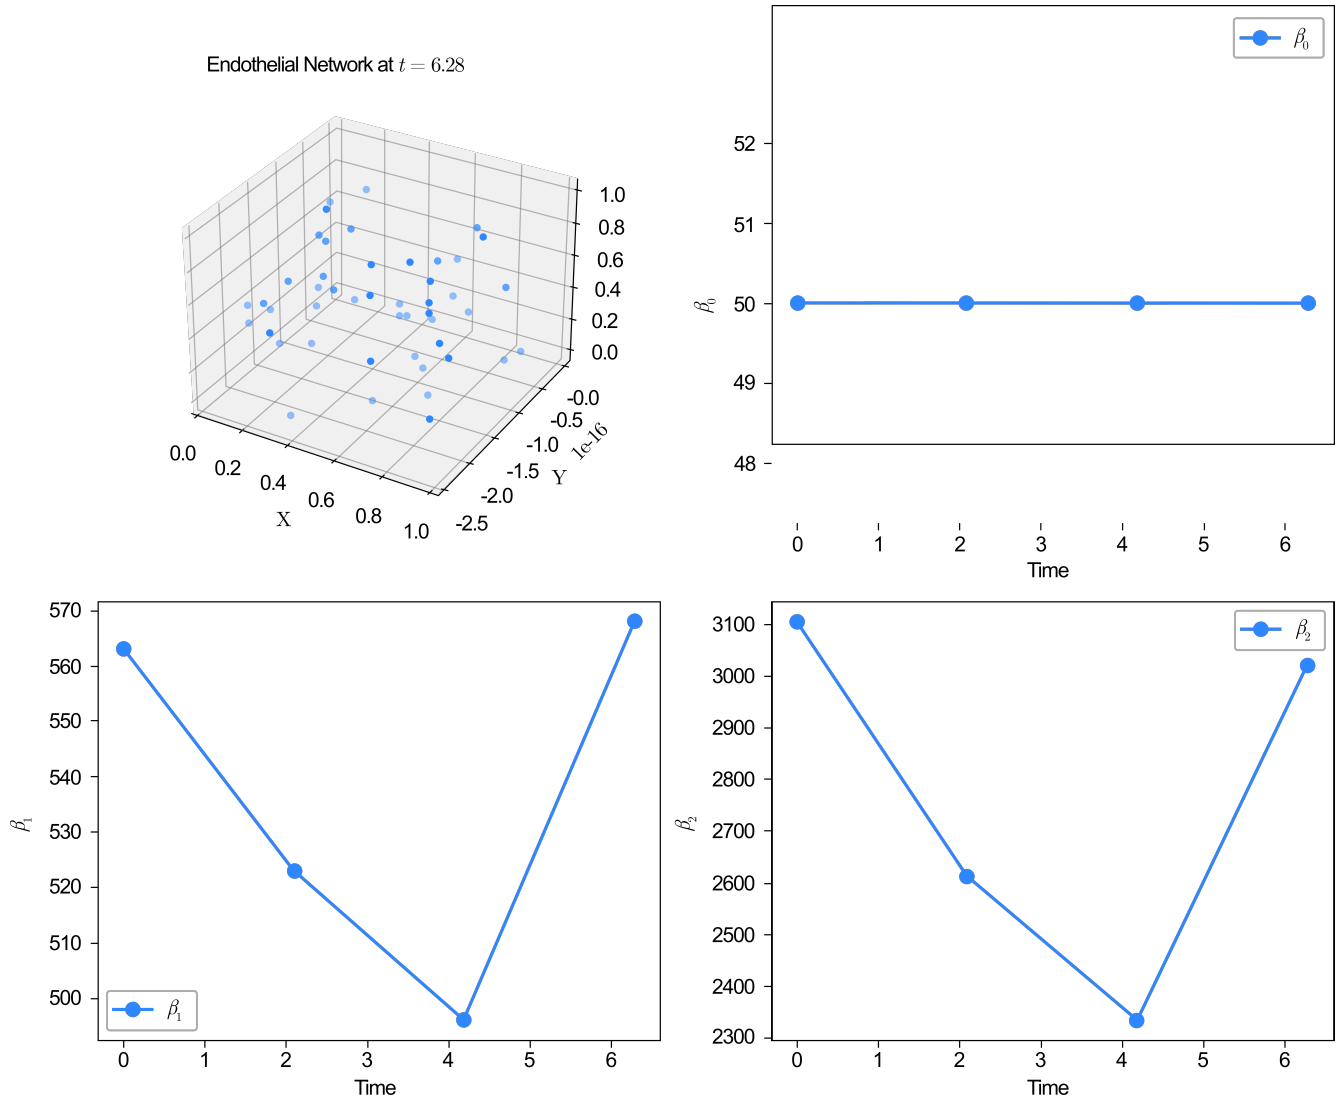


Figure 9. Evolution of topological invariants of an endothelial network embedded in $\mathbb{R}^3$. The Betti numbers β_0 , β_1 , and β_2 , which count the number of connected components, cycles, and voids respectively, change over time as the network remodels.

To quantify the evolution of topological invariants, we can employ techniques from persistent homology, which provide a multiscale description of the topology of a spatial embedding and its change over time. Persistent homology computes the birth and death times of topological features as a filtration parameter (such as a distance threshold or time) varies, yielding a barcode or persistence diagram that summarizes the topological structure of the embedding across scales.

By applying persistent homology to spatiotemporal embeddings of π -graphs, we can track the emergence, persistence, and disappearance of topological features in evolving endothelial networks. This provides a powerful tool to compare the topological dynamics of different networks, detect critical transitions or bifurcations, and identify topological biomarkers of vascular dysfunction.

4 Discussion

In this paper, we have introduced a novel mathematical framework called π -graphs to represent the complex multi-scale connectivity structure of endothelial networks. π -graphs capture the essence of endothelial connectivity by abstracting the detailed physiology of intercellular junctions into a concise, mathematically tractable formalism based on set theory, topology, and graph theory.

The key ingredients of the π -graph framework are:

- A finite set $\mathcal{E}$ of endothelial cells (ECs).

- A collection $\mathcal{J}_{\mathcal{E}} = \sim_{AJ}, \sim_{TJ}, \sim_{GJ}, \sim_{NJ}$ of symmetric binary relations on $\mathcal{E}$ representing different types of intercellular junctions.
- A π -incidence map $\pi : \mathcal{E} \rightarrow \mathcal{P}(\mathcal{J}_{\mathcal{E}})$ assigning to each EC the set of junctions it participates in, subject to basic consistency and nondegeneracy conditions.

The π -incidence map is the heart of the formalism, encoding the local junction architecture around each EC in a manner that is both biologically expressive and mathematically elegant. In contrast to standard graph representations, π -graphs natively capture the multiplicity of junction types and their combinatorial arrangement around ECs.

We have developed the basic theory of π -graphs, including notions of π -graph isomorphism, π -graph union, and π -graph connectivity, that highlight the rich mathematical structure of the formalism. In particular, we have shown that π -graph isomorphism is a strictly stronger notion than isomorphism of the underlying "unnested" EC graphs obtained by forgetting the π -incidence structure (Proposition 2). This underscores the importance of the π -incidence in capturing the full complexity of endothelial connectivity.

At the same time, we have established conditions under which π -graph isomorphism and EC graph isomorphism coincide (Proposition 3), namely when any two ECs share at most one type of junction and different junction types link ECs to disjoint sets of neighbors. These conditions have a natural biological interpretation and suggest that in certain regimes, one can work with the simpler EC graph representation without losing essential connectivity information.

To further ground the π -graph formalism in biological reality, we have introduced a spatial representation framework that allows embedding π -graphs into Euclidean space in a geometry-preserving manner. The key idea is to represent ECs as points or regions in space and junctions as lines, surfaces, or more general compact subsets, constrained by an incidence compatibility condition that ensures the geometric embedding respects the π -incidence structure.

The spatial embedding framework is highly flexible and can accommodate a variety of biologically relevant geometric features, such as the size and shape of ECs, the thickness and tortuosity of junctions, and the density of junctions per unit volume. Mathematically, the framework draws on concepts from topological graph theory and the theory of abstract cell complexes, providing a rigorous foundation for studying the interplay between the combinatorial connectivity and geometric arrangement of endothelial networks.

A central theme that emerges from the spatial embedding framework is the importance of topological invariants - properties of embedded π -graphs that are preserved by continuous deformations of the embedding. Examples of key topological invariants include the number of connected components, the number and type of cycles, and the homology groups that capture higher-dimensional "holes" in the embedding.

The study of topological invariants provides a powerful tool to classify and compare endothelial networks across different biological contexts, independent of the precise geometric details. For instance, one could use topological invariants to quantify the degree of network remodeling during angiogenesis, or to characterize the topological defects that arise in pathological conditions such as vascular leakage or tumor angiogenesis.

The introduction of a temporal dimension to the π -graph formalism and the study of evolving topological invariants open up new avenues to investigate the dynamics of endothelial networks. By representing the time-varying connectivity and spatial embedding of endothelial networks, temporal π -graphs provide a natural framework to model angiogenesis, vascular remodeling, and other dynamic processes in the endothelium.

The application of persistent homology to track the evolution of topological invariants offers a principled way to quantify the multiscale topology of endothelial networks and its change over time. Persistent homology can detect the birth, persistence, and death of topological features such as connected components, cycles, and higher-dimensional holes, which may reflect the formation, stability, and regression of vascular structures. By comparing the persistence diagrams or barcodes of different endothelial networks, we can gain insight into the topological basis of vascular function and dysfunction.

From a broader perspective, the temporal π -graph formalism and evolving topological invariants contribute to the growing field of dynamical systems and network evolution. Endothelial networks provide a rich biological context to study the coupling between network topology, geometry, and dynamics, and to explore the emergence of complex behavior from simple local rules. The π -graph framework also has potential applications to other biological systems that exhibit time-varying connectivity, such as neural networks, cellular signaling pathways, and ecological communities.

To fully realize the potential of the temporal π -graph formalism, several challenges and opportunities for future work remain. Some key directions include:

- Developing efficient algorithms to compute and update π -graphs and their topological invariants from time-series data, such as live-cell imaging of endothelial junctions.
- Integrating temporal π -graphs with models of endothelial cell mechanics, migration, and signaling to predict the dynamics of network remodeling and its feedback on cell behavior.

- Investigating the role of junction plasticity, EC heterogeneity, and microenvironmental cues in shaping the temporal topology of endothelial networks.
- Applying the temporal π -graph framework to study the topological basis of vascular patterning, anastomosis, and pruning during development and disease.
- Comparing the topological dynamics of endothelial networks across different tissues, species, and experimental conditions to identify conserved and divergent features.
- Constructing temporal π -graphs from experimental data, such as imaging of junction protein localization or freeze-fracture electron microscopy, to bridge the gap between molecular and tissue-scale dynamics.

The temporal π -graph formalism and evolving topological invariants in particular provide a powerful lens to study the dynamics of endothelial networks across scales. By integrating tools from algebraic topology, dynamical systems, and network science, this framework can drive new discoveries and applications in vascular biology and beyond. As the field of mathematical biology continues to grow, we anticipate that temporal π -graphs will find broader utility in modeling and analyzing the structure, function, and dynamics of complex biological systems.

As the explosion of experimental data on endothelial network structure continues, the π -graph formalism can provide a unifying mathematical language to organize, analyze, and interpret this data in a principled way. At the same time, the study of π -graphs as mathematical objects in their own right may inspire new theoretical questions and constructions that enrich the broader field of applied topology and network science.

In conclusion, the π -graph framework introduced here represents an exciting new direction in the systems biology of the endothelium that can bridge the gap between molecular-level mechanisms and tissue-level function. By providing a rigorous mathematical foundation for studying the connectivity, geometry, and topology of endothelial networks, π -graphs have the potential to catalyze new discoveries and advances in vascular biology and beyond. As such, we believe the π -graph formalism will be a valuable addition to the rapidly growing toolkit of mathematical methods in biology and medicine.

References

1. Godo, S. & Shimokawa, H. Endothelial functions. *Arter. Thromb. Vasc. Biol.* **37**, DOI: [10.1161/atvbaha.117.309813](https://doi.org/10.1161/atvbaha.117.309813) (2017).
2. Pilard, M., Ollivier, E. L., Gourdou-Latyszenok, V., Couturaud, F. & Lemarié, C. A. Endothelial cell phenotype, a major determinant of venous thrombo-inflammation. *Front. Cardiovasc. Medicine* **9**, DOI: [10.3389/fcvm.2022.864735](https://doi.org/10.3389/fcvm.2022.864735) (2022).
3. Krüger-Genge, A., Blocki, A., Franke, R.-P. & Jung, F. Vascular endothelial cell biology: An update. *Int. J. Mol. Sci.* **20**, DOI: [10.3390/ijms20184411](https://doi.org/10.3390/ijms20184411) (2019).
4. Aird, W. C. Phenotypic heterogeneity of the endothelium: I. structure, function, and mechanisms. *Circ. Res.* **100**, 158–173, DOI: [10.1161/01.res.0000255691.76142.4a](https://doi.org/10.1161/01.res.0000255691.76142.4a) (2007).
5. Yang, Y. & Torbey, M. T. Angiogenesis and blood-brain barrier permeability in vascular remodeling after stroke. *Curr. Neuropharmacol.* **18**, 1250–1265, DOI: [10.2174/1570159x18666200720173316](https://doi.org/10.2174/1570159x18666200720173316) (2020).
6. Sailem, H. Z. & Al Haj Zen, A. Morphological landscape of endothelial cell networks reveals a functional role of glutamate receptors in angiogenesis. *Sci. Reports* **10**, DOI: [10.1038/s41598-020-70440-0](https://doi.org/10.1038/s41598-020-70440-0) (2020).
7. Zudaire, E., Gambardella, L., Kurcz, C. & Vermeren, S. A computational tool for quantitative analysis of vascular networks. *PLoS ONE* **6**, e27385, DOI: [10.1371/journal.pone.0027385](https://doi.org/10.1371/journal.pone.0027385) (2011).
8. Beter, M. *et al.* Sproutango: an open-source bioimage informatics tool for quantitative analysis of sprouting angiogenesis and lumen space. *Sci. Reports* **13**, DOI: [10.1038/s41598-023-33090-6](https://doi.org/10.1038/s41598-023-33090-6) (2023).
9. Lamberti, F., Montrucchio, B. & Gamba, A. Quantitative analysis of vascular structures geometry using neural networks. In *IEEE Workshop on Signal Processing Systems Design and Implementation, 2005.*, 378–383, DOI: [10.1109/SIPS.2005.1579897](https://doi.org/10.1109/SIPS.2005.1579897) (2005).
10. Materka, A. & Jurek, J. Using deep learning and b-splines to model blood vessel lumen from 3d images. *Sensors* **24**, 846, DOI: [10.3390/s24030846](https://doi.org/10.3390/s24030846) (2024).
11. Stoewer, P. *et al.* Neural network based successor representations to form cognitive maps of space and language. *Sci. Reports* **12**, DOI: [10.1038/s41598-022-14916-1](https://doi.org/10.1038/s41598-022-14916-1) (2022).
12. Sorokina, M., Medigue, C. & Vallenet, D. A new network representation of the metabolism to detect chemical transformation modules. *BMC Bioinforma.* **16**, DOI: [10.1186/s12859-015-0809-4](https://doi.org/10.1186/s12859-015-0809-4) (2015).
13. Jin, S. *et al.* Inference and analysis of cell-cell communication using cellchat. *Nat. Commun.* **12**, DOI: [10.1038/s41467-021-21246-9](https://doi.org/10.1038/s41467-021-21246-9) (2021).
14. Ma, Q., Li, Q., Zheng, X. & Pan, J. Cellcommunit: an atlas of cell–cell communication networks from single-cell rna sequencing of human and mouse tissues in normal and disease states. *Nucleic Acids Res.* **52**, D597–D606, DOI: [10.1093/nar/gkad906](https://doi.org/10.1093/nar/gkad906) (2023).
15. Koh, G. C. K. W., Porras, P., Aranda, B., Hermjakob, H. & Orchard, S. E. Analyzing protein–protein interaction networks. *J. Proteome Res.* **11**, 2014–2031, DOI: [10.1021/pr201211w](https://doi.org/10.1021/pr201211w) (2012).
16. Dejana, E., Orsenigo, F., Molendini, C., Baluk, P. & McDonald, D. M. Organization and signaling of endothelial cell-to-cell junctions in various regions of the blood and lymphatic vascular trees. *Cell Tissue Res.* **335**, 17–25, DOI: [10.1007/s00441-008-0694-5](https://doi.org/10.1007/s00441-008-0694-5) (2008).
17. Meng, W. & Takeichi, M. Adherens junction: Molecular architecture and regulation. *Cold Spring Harb. Perspectives Biol.* **1**, a002899–a002899, DOI: [10.1101/cshperspect.a002899](https://doi.org/10.1101/cshperspect.a002899) (2009).
18. Anderson, J. M. & Van Itallie, C. M. Physiology and function of the tight junction. *Cold Spring Harb. Perspectives Biol.* **1**, a002584–a002584, DOI: [10.1101/cshperspect.a002584](https://doi.org/10.1101/cshperspect.a002584) (2009).
19. Goodenough, D. A. & Paul, D. L. Gap junctions. *Cold Spring Harb. Perspectives Biol.* **1**, a002576–a002576, DOI: [10.1101/cshperspect.a002576](https://doi.org/10.1101/cshperspect.a002576) (2009).
20. Takai, Y. & Nakanishi, H. Nectin and afadin: novel organizers of intercellular junctions. *J. Cell Sci.* **116**, 17–27, DOI: [10.1242/jcs.00167](https://doi.org/10.1242/jcs.00167) (2003).
21. Moorhead, A. Mal'cev complexes, DOI: [10.48550/ARXIV.2311.02759](https://doi.org/10.48550/ARXIV.2311.02759) (2023).
22. Trinkle, S., Foxley, S., Wildenberg, G., Kasthuri, N. & La Rivière, P. The role of spatial embedding in mouse brain networks constructed from diffusion tractography and tracer injections. *NeuroImage* **244**, 118576, DOI: [10.1016/j.neuroimage.2021.118576](https://doi.org/10.1016/j.neuroimage.2021.118576) (2021).